
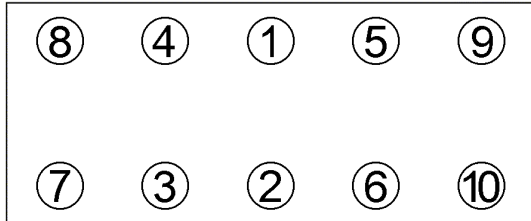


<b>Anziehvorschrift für Zylinderkopf</b>	<b>851.051</b>	 Das Original
<b>Tightening Instructions for Cylinder Head</b>		
<b>Instructions de serrage pour culasse</b>		
<b>Prescripciones de apriete para culatas</b>		
	passend für / suitable for adaptable à / adaptable a	<b>Renault</b>

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



111.460  
M 12x1,5x119



Anziehen/ \* 30 Nm  
Tightening/ ► 80°±4°  
Serrage/ ● 3 min  
Apriete □ 25 Nm + 213°±7°

Zeichenerklärung / Explanations / Explication / Explicacion

*	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
►	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

81 mm Ø, 1,55 mm  $\frac{\pi}{8}$ , 3 Kerben/notches/muescas

Mot. F9Q Turbo Diesel  
1870 ccm 59-72 kW (80-98 PS)

Clio II                      Kangoo  
Megane                    Laguna  
Scenic

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*851.051\***