
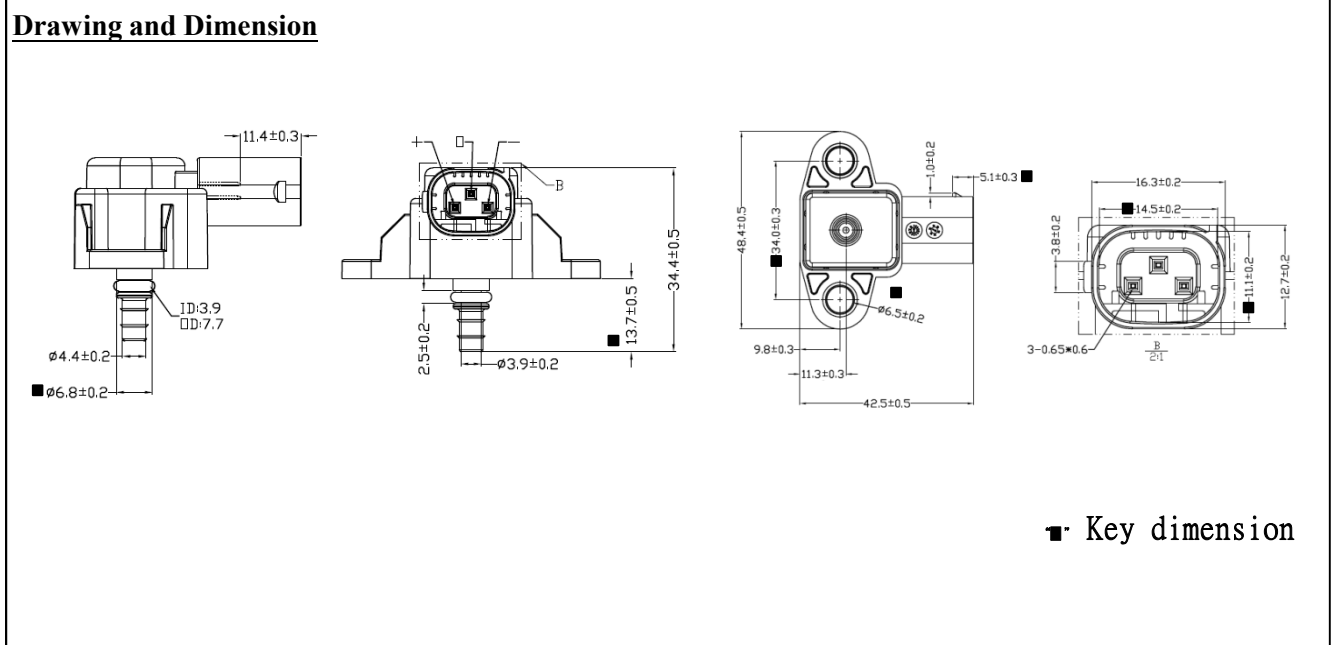


NAME	MS-E006 Electrical Specifications	NO	MS-1-4-005
-------------	--	-----------	-------------------

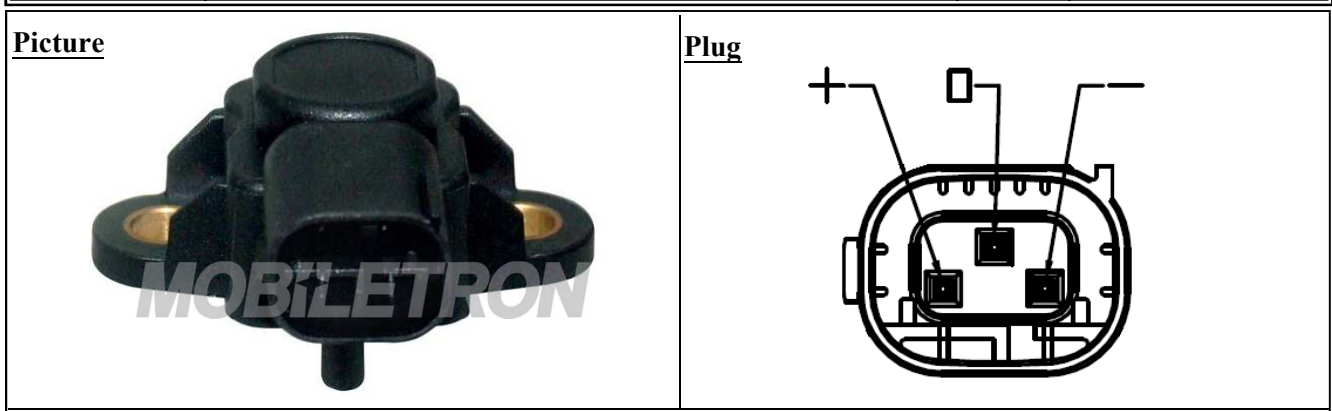

PARAMETERS AND CONDITIONS	SYMBOLS	MIN.	TYP.	MAX.	UNITS
Storage Temperature Range	T _{ST}	-40		150	°C
Operating Temperature Range	T _{OP}	-40		125	°C
Pressure Range	P _r	5		350	KPa
Supply Voltage	V _{Sv}	0.298		4.696	V
Supply Current	I _{sc}		10		mA
Accuracy @ 25°C	%FS	-3		+3	%FS
The MAP voltage output at 25°C (@ Supply Voltage (Vs) = 5.0Vdc, rated pressure = 101.3KPa)	V	1.02	1.32	1.62	V

2020.11.19		1	呂漢榮	王亮	黃鵬	MOBILETRON
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	Nov.24.2020
						Release