
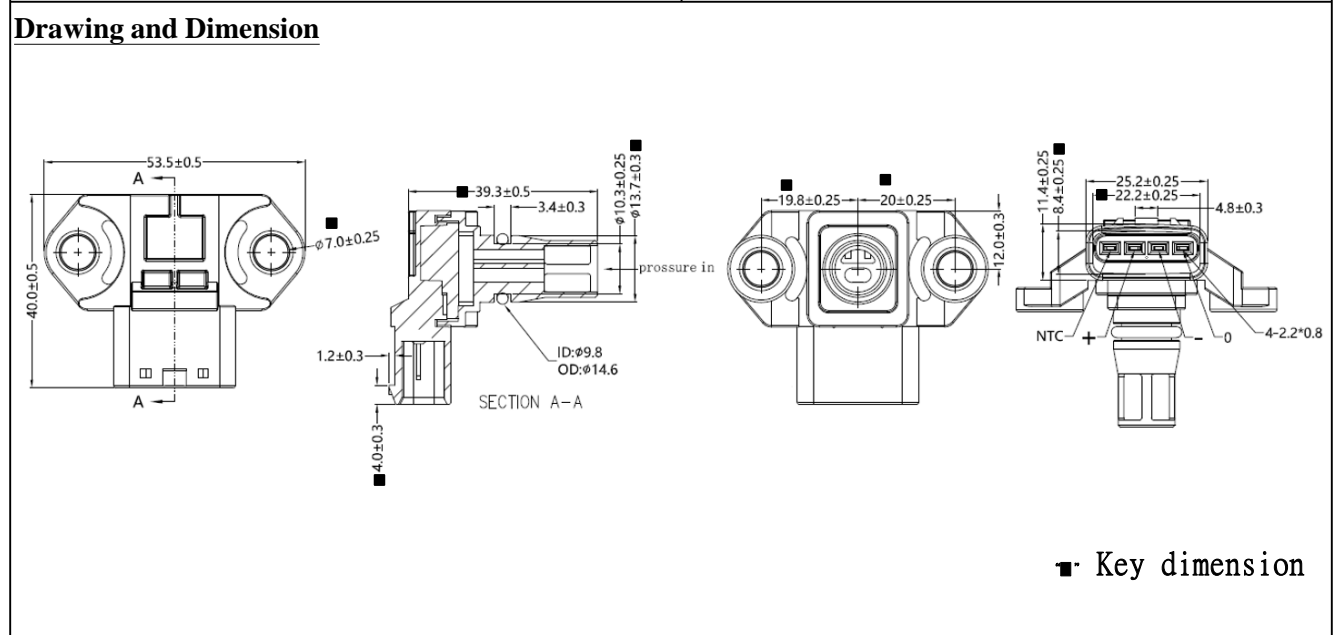


<b>NAME</b>	<b>MS-E070 Electrical Specifications</b>	<b>NO</b>	<b>MS-1-4-091</b>
-------------	--	-----------	-------------------

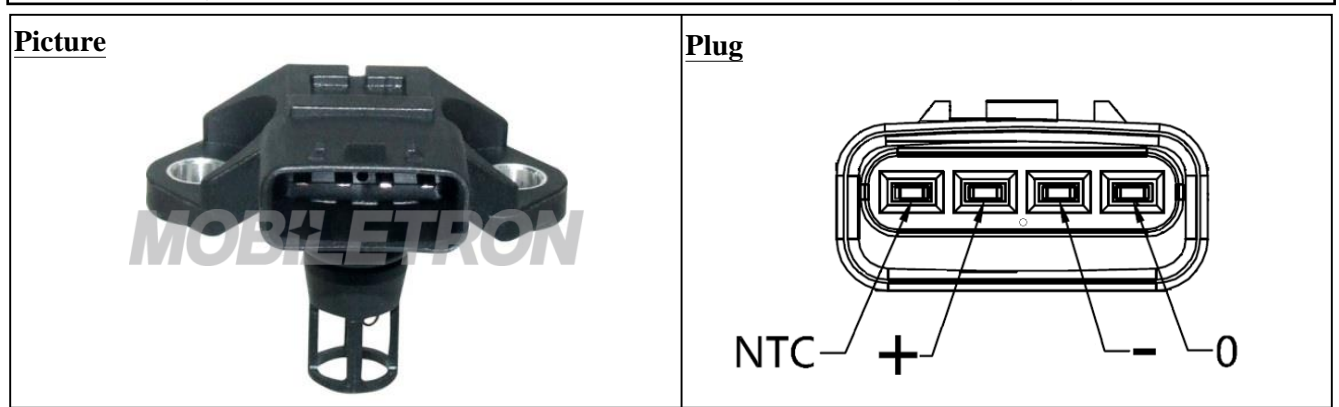

PARAMETERS AND CONDITIONS	SYMBOLS	MIN.	TYP.	MAX.	UNITS
<b>Storage Temperature Range</b>	$T_{ST}$	-40		150	°C
<b>Operating Temperature Range</b>	$T_{OP}$	-40		125	°C
<b>Pressure Range</b>	$P_r$	15		260	KPa
<b>Supply Voltage</b>	$V_{Sv}$	4.8		5.2	V
<b>Supply Current</b>	$I_{sc}$		10		mA
<b>Accuracy @ 25°C</b>	%FS	-3		+3	%FS
<b>The MAP voltage output at 25°C</b> (@ Supply Voltage ( $V_s$ ) =5.0Vdc, rated pressure = 101.3KPa )	V	3.33	3.63	3.93	V

2021.02.25		1	王亮	呂漢榮	黃鵬	<b>MOBILETRON</b>
Date of first edition	Date of revised edition	edition	Manuscript	Review	Approval	Mar.02.2021
						Release